

NEWYOO

Thank you for your purchase. If you have any questions or coments, please feel free to contact us.



OFFICIAL WEBSITE

Official website QR code →

www.newyoo.net



YouTube QR code →

https://www.youtube.com/channel/UCG64tsqZgTbfL5p_G6fgAcw/videos



Amazon newyoo Store →

https://www.amazon.com/stores/NEWYOO/page/78A5D0BA-CCDE-4ED4-9E39-CFDD9EB33A9D?ref_=ast_bln



Customer Support: Support@newyoo.net




Business Contact: Sales@newyoo.net

Multifunctional Balance Bike

Owner's Manual

Model :TR009

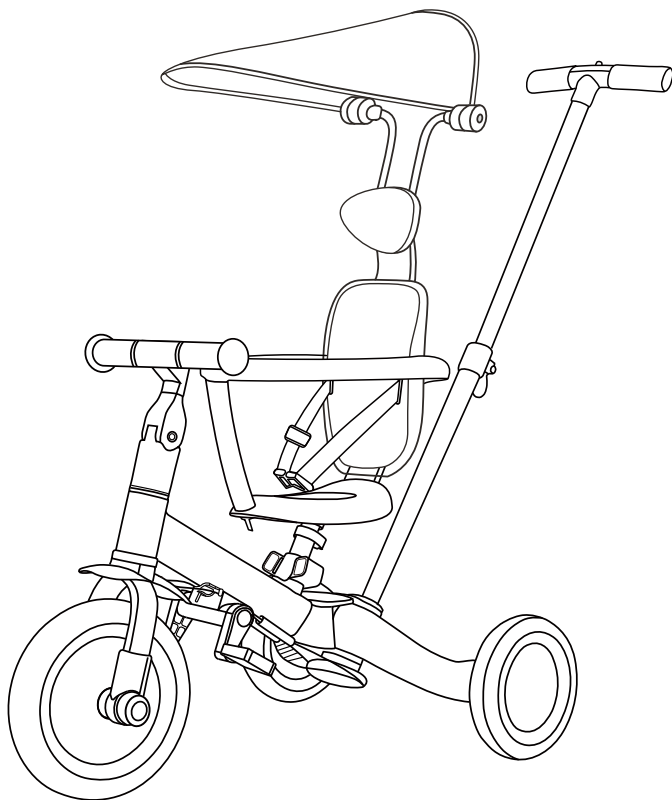

Read all instructions before assembly and use. Keep this manual for future reference.

WARNING: Failure to follow the instructions for assembly may result in defect, damage, or injury.

6 in 1 Balance Bike

1




Push Tricycle Mode with Sunshade
(12 Months+)

2




Push Tricycle Mode (12 Months+)

3

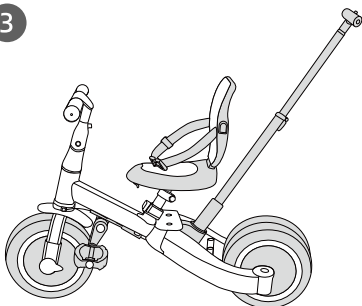


Push Balance Bike Mode (18 Months+)

4

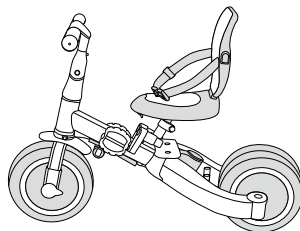


Balance Bike Mode (24 Months+)

5

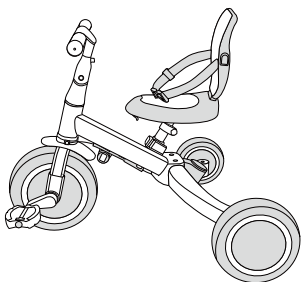

Tricycle Mode (30 Months+)


6

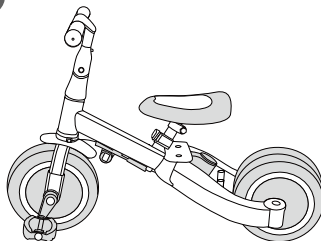

Bike Mode (34 Months+)


Parts List

A

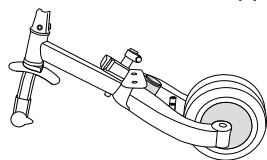


Main Body & Rear Wheels

B




Handlebar

C




Guard Bar

D




Seat

E




Backrest & Safety Belt

F




Front Wheel

G



Headrest & Sunshade

H



Push Handle

I




Push rod connector

J




Black Plastic Spacer x 2

K



Seatpost Clamp

L




Pedal x2

WARNING: Please check you have all the parts before assembly.

How to Assemble

1

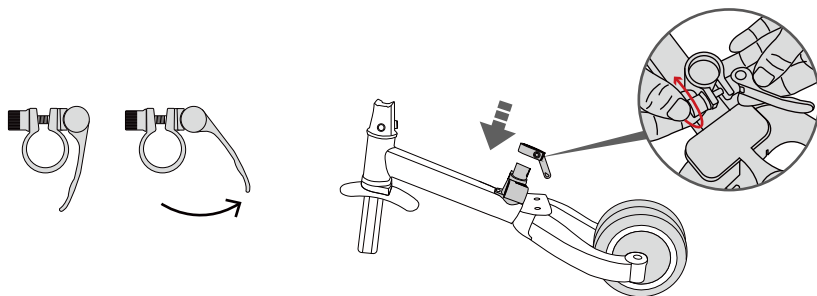


01. Open the Clamp Lever as shown.

02. Place it onto the seat tube.

03. Tighten up the clamp bolt, Make sure it's tightened, otherwise the seat will be moving up and down.

2

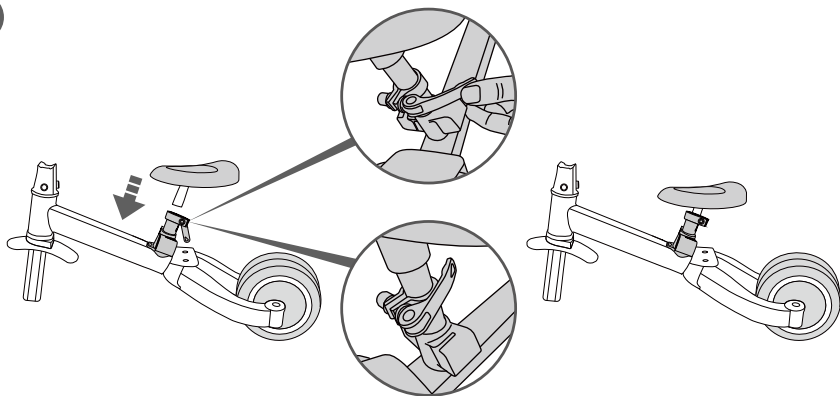


01. Insert the seatpost into the seat tube until it reaches the desired height for your riding position.

02. Once the seatpost is in position, close the quick-release lever to clamp the seatpost securely. You may need to apply some force to close the lever fully.


03. After closing the clamp lever, check the tension by trying to move the seatpost up and down. It should be securely held in place without any slippage.

3

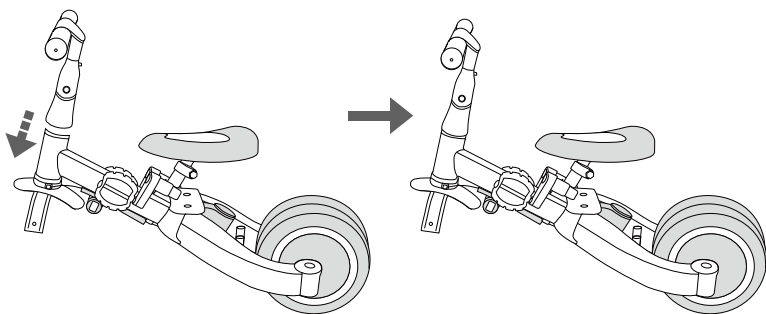


Make sure the handlebar is inserted into the stem fully and securely.

4

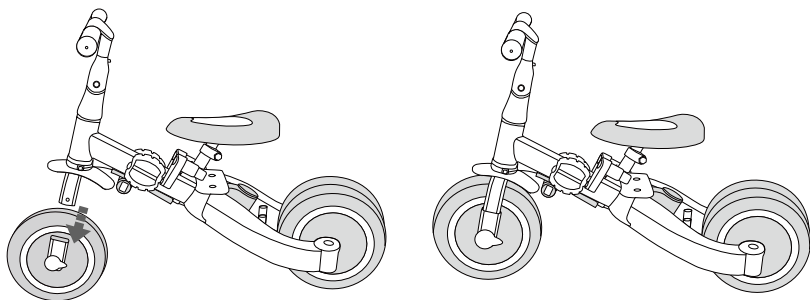


Insert and fix the front wheel.

5

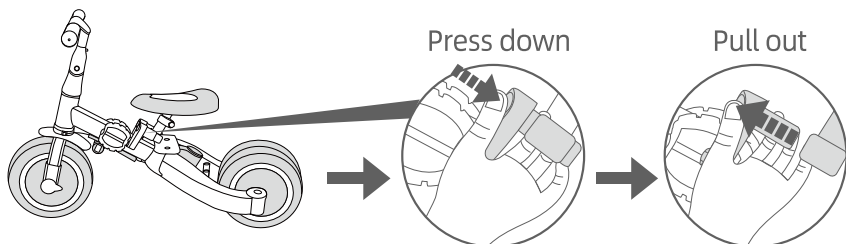


Make sure the handlebar is inserted into the stem fully and securely.

6

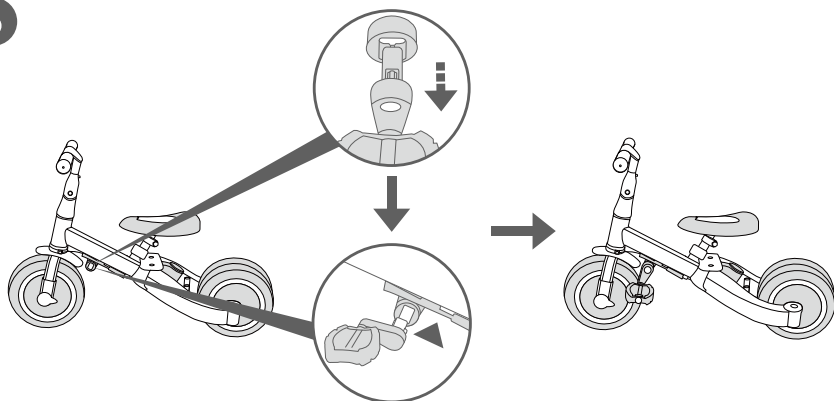


Put the black plastic spacers on the pedals and then insert them as shown.

7

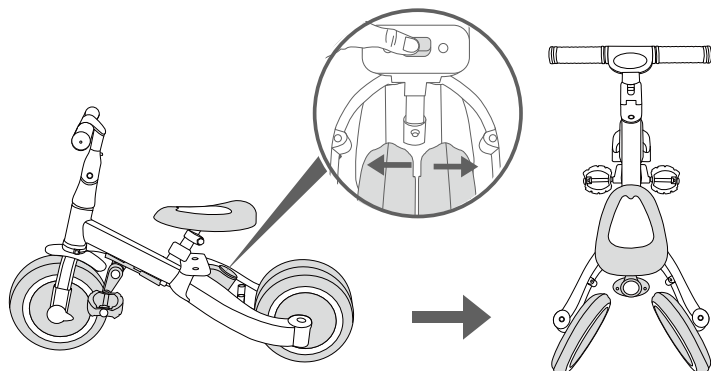


Press down the bottom button while taking rear wheels apart.

8

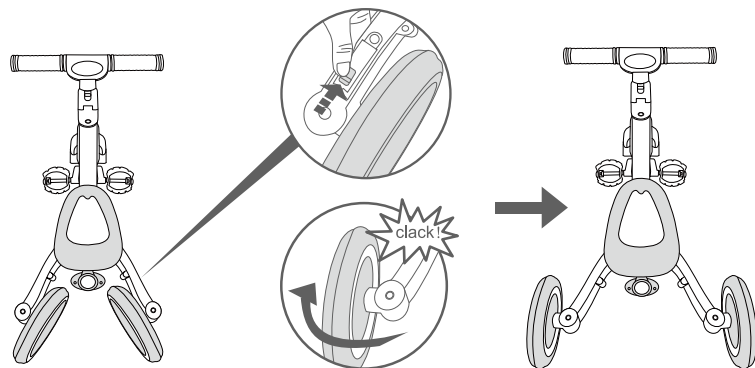


Pull up the button firstly and then rotate the rear wheels outwards.

9

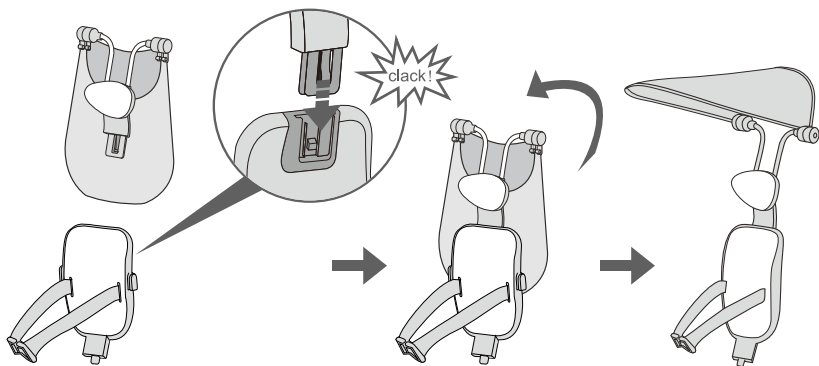


Insert the headrest into the backrest's buckle and secure it in place until you hear a "clack" sound.

10

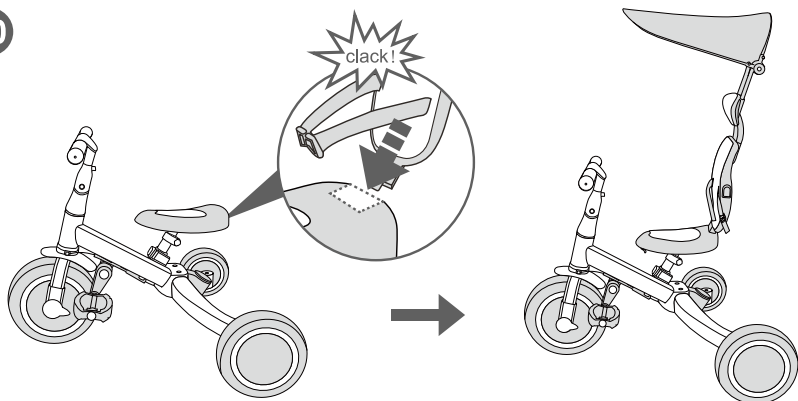


Insert and fix backrest into the saddle in place until hear a "clack".

11

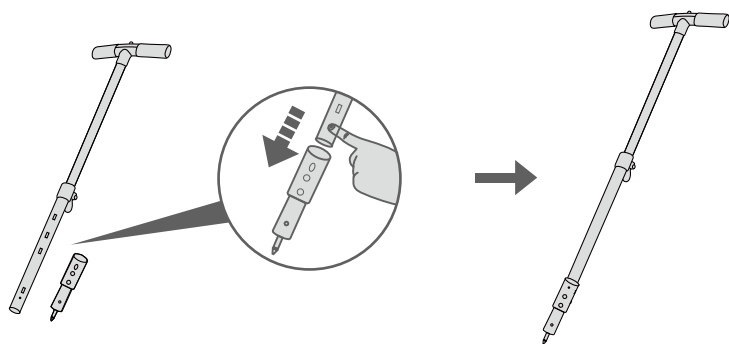


Press and hold the round elastic piece of the push rod with your finger, insert the push rod into the push rod connector, and hear a "click" to ensure it is in place.

12

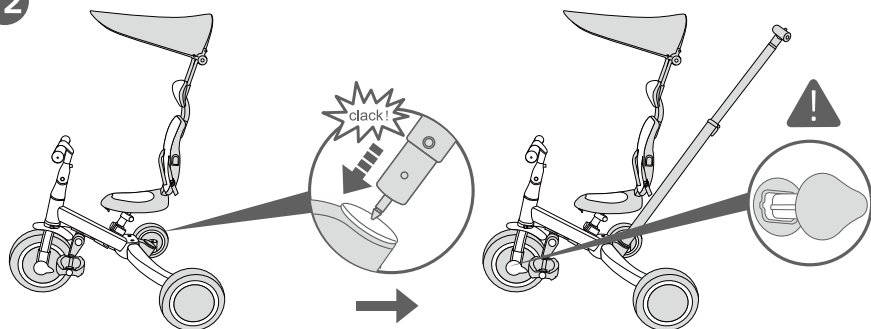


Insert the handlebar until hear a "clack".

13

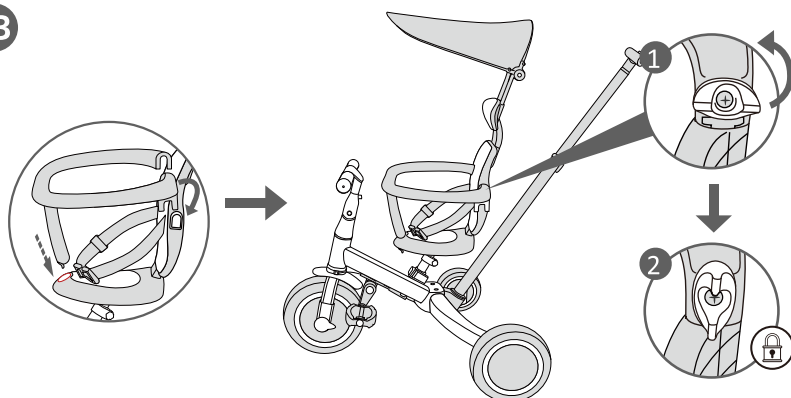


Install and disassemble the guard bar as shown.

14

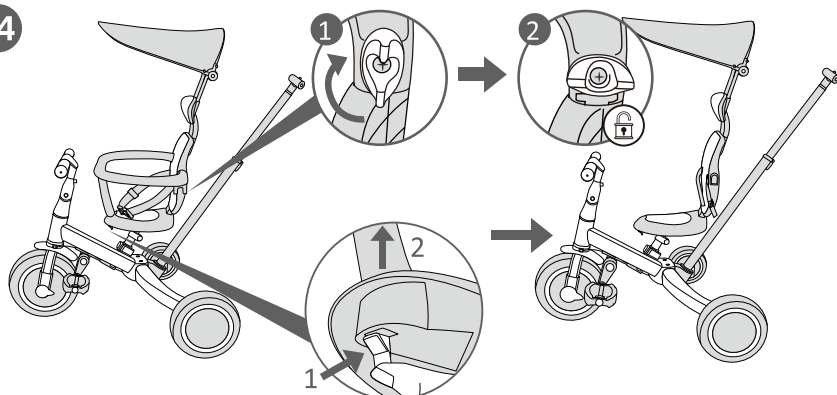


Install and disassemble the guard bar as shown.

15

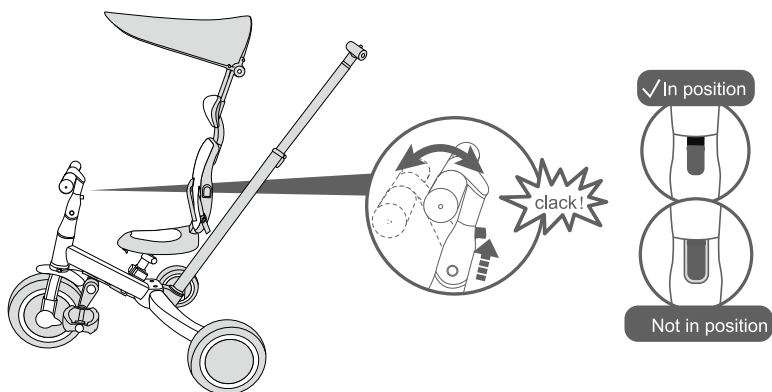

Adjust the handlebar and make sure it's locked as shown.


16

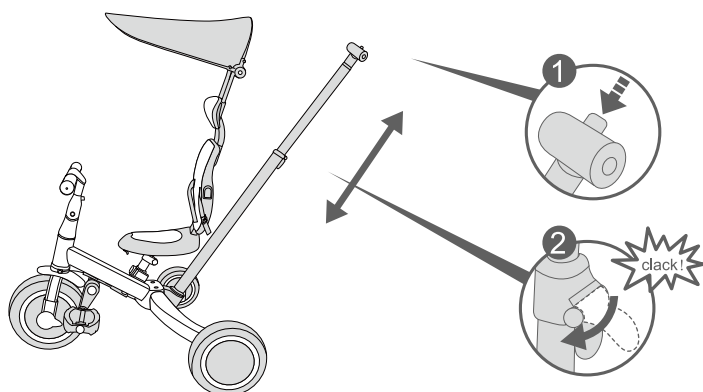

Adjust the push handle as shown. Flip it over to lock as figure 2 after adjustment.


How to Transform to Balance bike Mode

17

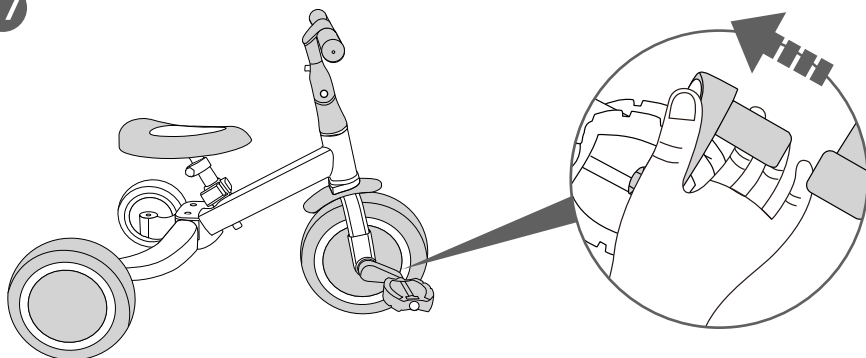


Press down the button and pull out the pedals.

18

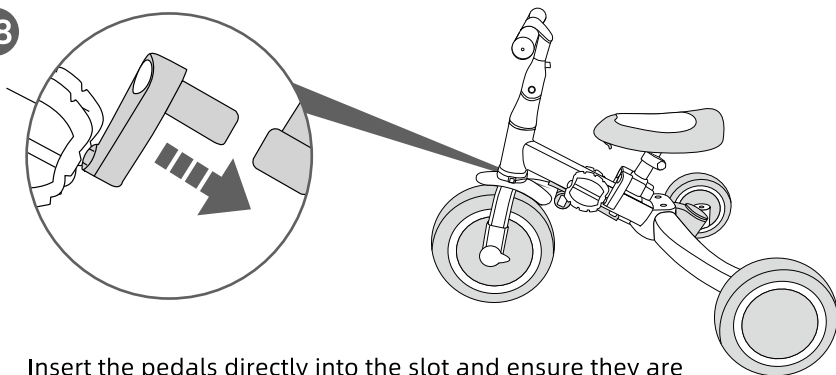

Insert the pedals directly into the slot and ensure they are fixed in place when you hear a "click".


19

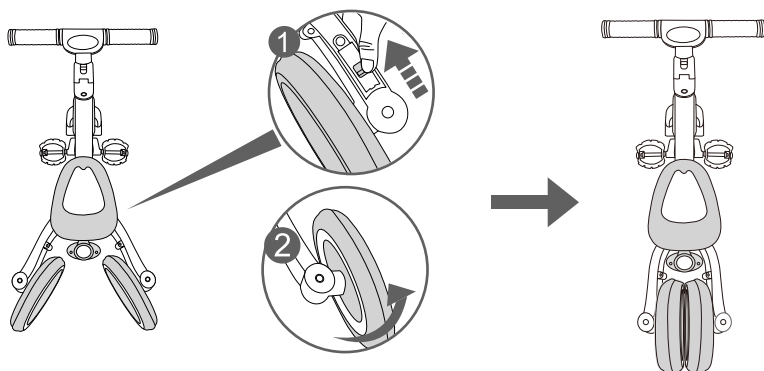

Push the button up while turning the rear wheel inward until you hear a "click".

How to Adjust Handlebar

20

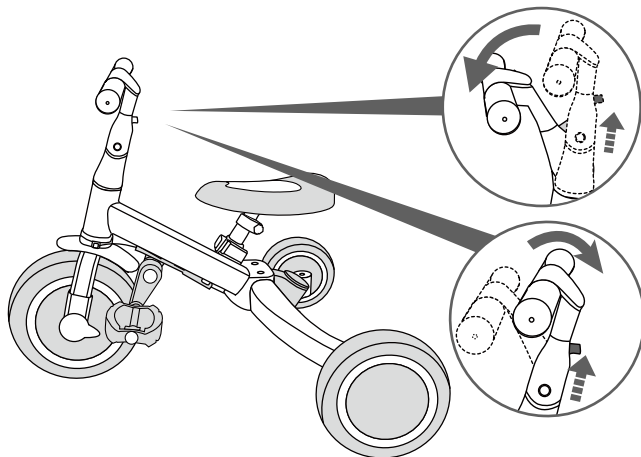


Push the button up while turning the handlebar forward until you hear a “click” . There are 3 gears can be adjusted.

CAUTION: If the handlebar is not locked, it may cause a fall and/or injury.

How to Adjust the Seat

21

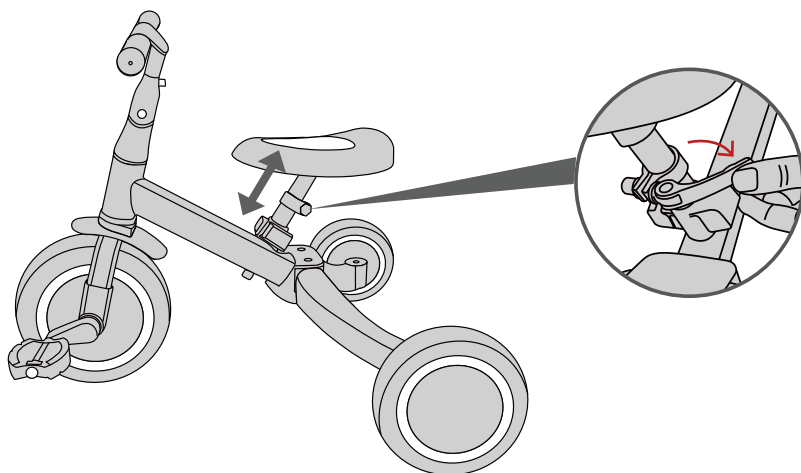

After open the clamp lever, you can adjust the most comfortable height for your child.

Product Care and Maintenance

- Please clean and wipe the balance bike with a dry cotton cloth.
- For the service life of the product, please add solid grease or anti-rust lubricant spray into the rotating parts regularly, such as axles and handlebar shafts.
- Check regularly if the screws are loose/falling off or the parts are worn. Please contact us at support@newyoo.net, if any screw or part is missing.

⚠ WARNING: TO AVOID SERIOUS INJURY:

- Continuous adult supervision required.
- Never use near motor vehicles.
- Never use near streets, swimming pools, hills, steps, or sloped driveways;
- Always wear shoes when using the tricycle.
- Never allow more than one rider.
- We recommend riders always wear a properly fitted helmet that complies with U.S. Consumer Product Safety Commission (CPSC) Standard 16 CFR 1203.
- Maximum Weight:
From 12 months to 36 months, the maximum load capacity of the children's tricycle bike mode is 18 KG.
From 36 months to 60 months, the maximum load capacity of the children's balance bike mode is 25 KG.
- Make certain that anyone who uses this tricycle has been fully instructed in its operation.
- Ensure that an adult has followed the assembly instructions to ensure the tricycle is assembled properly.
- Do not lift tricycle by the backrest or push handle.
- Make sure the handlebar, seat, backrest and front wheel are fully tightened before use.
- Skill is required to avoid falls or collision.